



## CORRUGATED STEEL SHEET T18


T18 corrugated steel sheet is manufactured in steel sheet, galvanized on both sides and protected with polyester. It is used especially on facades, fences or ceilings but can be mounted on the roof as covering.

DATA SHEET | CORRUGATED STEEL SHEET T18

DATA SHEET | CORRUGATED STEEL SHEET T18

### PRODUCTION SPECIFICATIONS:

- BILKA T18 corrugated sheet metal is manufactured with a nominal thickness between 0.4 – 0.7 mm, based on the construction requirements, the standard length of the modules ranges from 0.500 m and 13.5 m. Execution of modules with different lengths from the standard ones will be made after prior consultation with BILKA specialist.
- Corrugated sheet metal is profiled in two options: with folds outward for facade and folds inward for the roofs.
- 31 color options available, matt and glossy.
- **T18 P** for facade;
- **T18 A** for the roof.

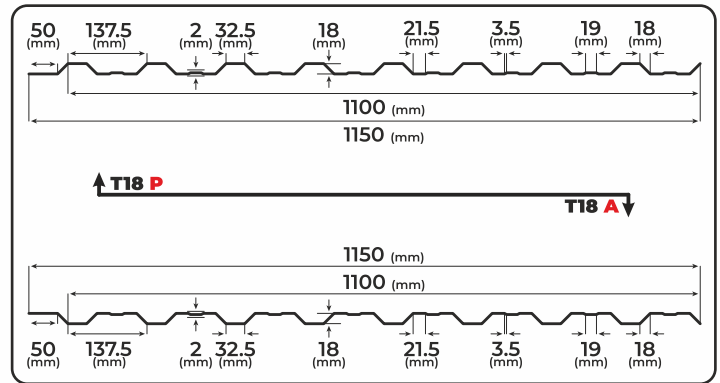

TECHNICAL CHARACTERISTICS	Material	Steel, galvanized sheet metal on both sides protected with polyester
	Standard thickness	0,4 mm - 0,7 mm
	Total width	1150 mm
	Usable width	1100 mm
	Total height	18 mm
	Weight on the surface	2 - 7 kg / mp
	Minimum slope	8° if no diagonal joints are necessary / 14° in the case of diagonal joints
	Glossy finish warranty	10-year warranty for colour characteristics and corrosion
	Matte finish warranty	15-year warranty for colour characteristics and corrosion
	Wood finish warranty	15-year warranty for colour characteristics and corrosion
GrandeMat finish warranty	30-year warranty for colour characteristics and corrosion	
Estimated life cycle	60 years for the roof, withstands temperature fluctuations	